

GLORIA SIDING PANELS

Dimensions:

- 350 mm X 16 mm

Available Lengths:

- 12' and 15'


Advantages:

- Better insulation
- Light in Weight
- Quick & Easy to install
- Beauty with less efforts
- Available in various finishes
- Available with fitting sections (Matching color)
- Suitable for Site offices, Residential blocks, any kind of extension work
- Excellent flatness
- Excellent UV characteristics that retain colour even after long exposure
- Weatherproof
- Adaptability to all temperatures
- Sound and heat insulation



DISCONTINUOUS SANDWICH PANELS

- Unique Features:**
- High thermal efficiency
 - High strength to weight ratio
 - Available in length upto 6 Mtrs.
 - Thickness range of 40 to 150 mm
 - Specially designed camlock type system for airtightness
 - Lightweight and easy to assemble
 - Relocatable-modular design
 - Maintenance free

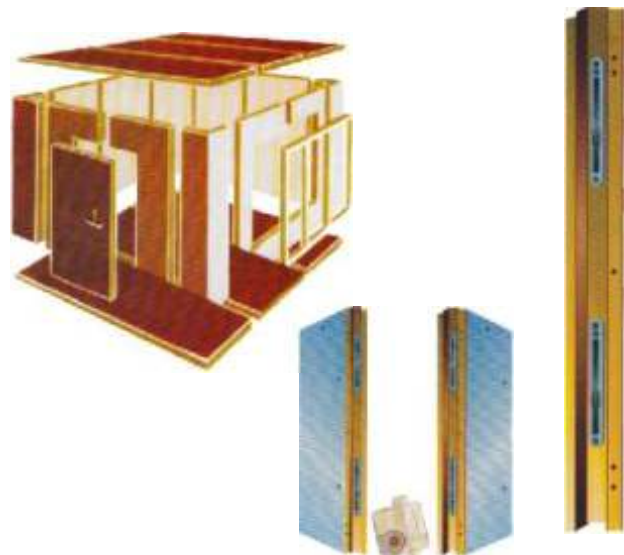

Typical properties of Sintex discontinuous panels:

Product code:	SIP 2001 TO 2099
Density	40 ± 2 Kg/cubic mtr
Temp. range	-80 Degree C to 100 Degree C
Thermal conductivity	0.02 w/mK
Tensile strength	4 Kg/ cm ²
Fire rating	Selfextinguishing
Length	Upto 6 Mtrs.
Width	1170mm/1000mm
Thickness range	40 mm to 150 mm
External facing	Colour coated steel sheet
Internal facing	Colour coated steel sheet